


# Maintenance Guideline

- Topdress the finished product with sand with approximately 1lb per square foot, spreading the sand out evenly which gives the grass extra nutrients (optional)
- Water the surface after topdressing
- Water regularly, just like you would with natural grass
- Depending on the season, you will see grass starting to grow through the holes in just a few days or a few weeks. Wait up to 3-4 weeks before doing any mowing and keep off as much as possible for optimal integration
- Depending on your Exolawn product, mowing height will vary (view the chart below to find out your correct mowing height)
- After mowing, it is important to blow or lightly rake off the grass blades that have been cut
- If there are areas that go dormant due to extreme traffic, aerate with solid tines, re-seed then topdress with sand. In most cases, just re-seeding and topdressing will do the trick!

Name	Mowing height	Sanding height	Application	Natural grass	Installation
1201	1/2"	1/2" <	Extreme traffic	~ 38%	Directly on Surface
2003	4/5"	1lb per sq ft	Medium traffic	~ 58%	Directly on Surface
2802	1"	1.8 cm <	Extreme traffic	~ 50%	Directly on Surface
4003	1.25"	2-2.5 cm <	Heavy traffic	~ 58%	Directly on Surface
4004	1.25"	1lb per sq ft	Medium traffic	~ 63%	Directly on Surface

## Exolawn

- 1 Ground Preparation
- 2 Installation Instructions
- 3 Maintenance Guideline

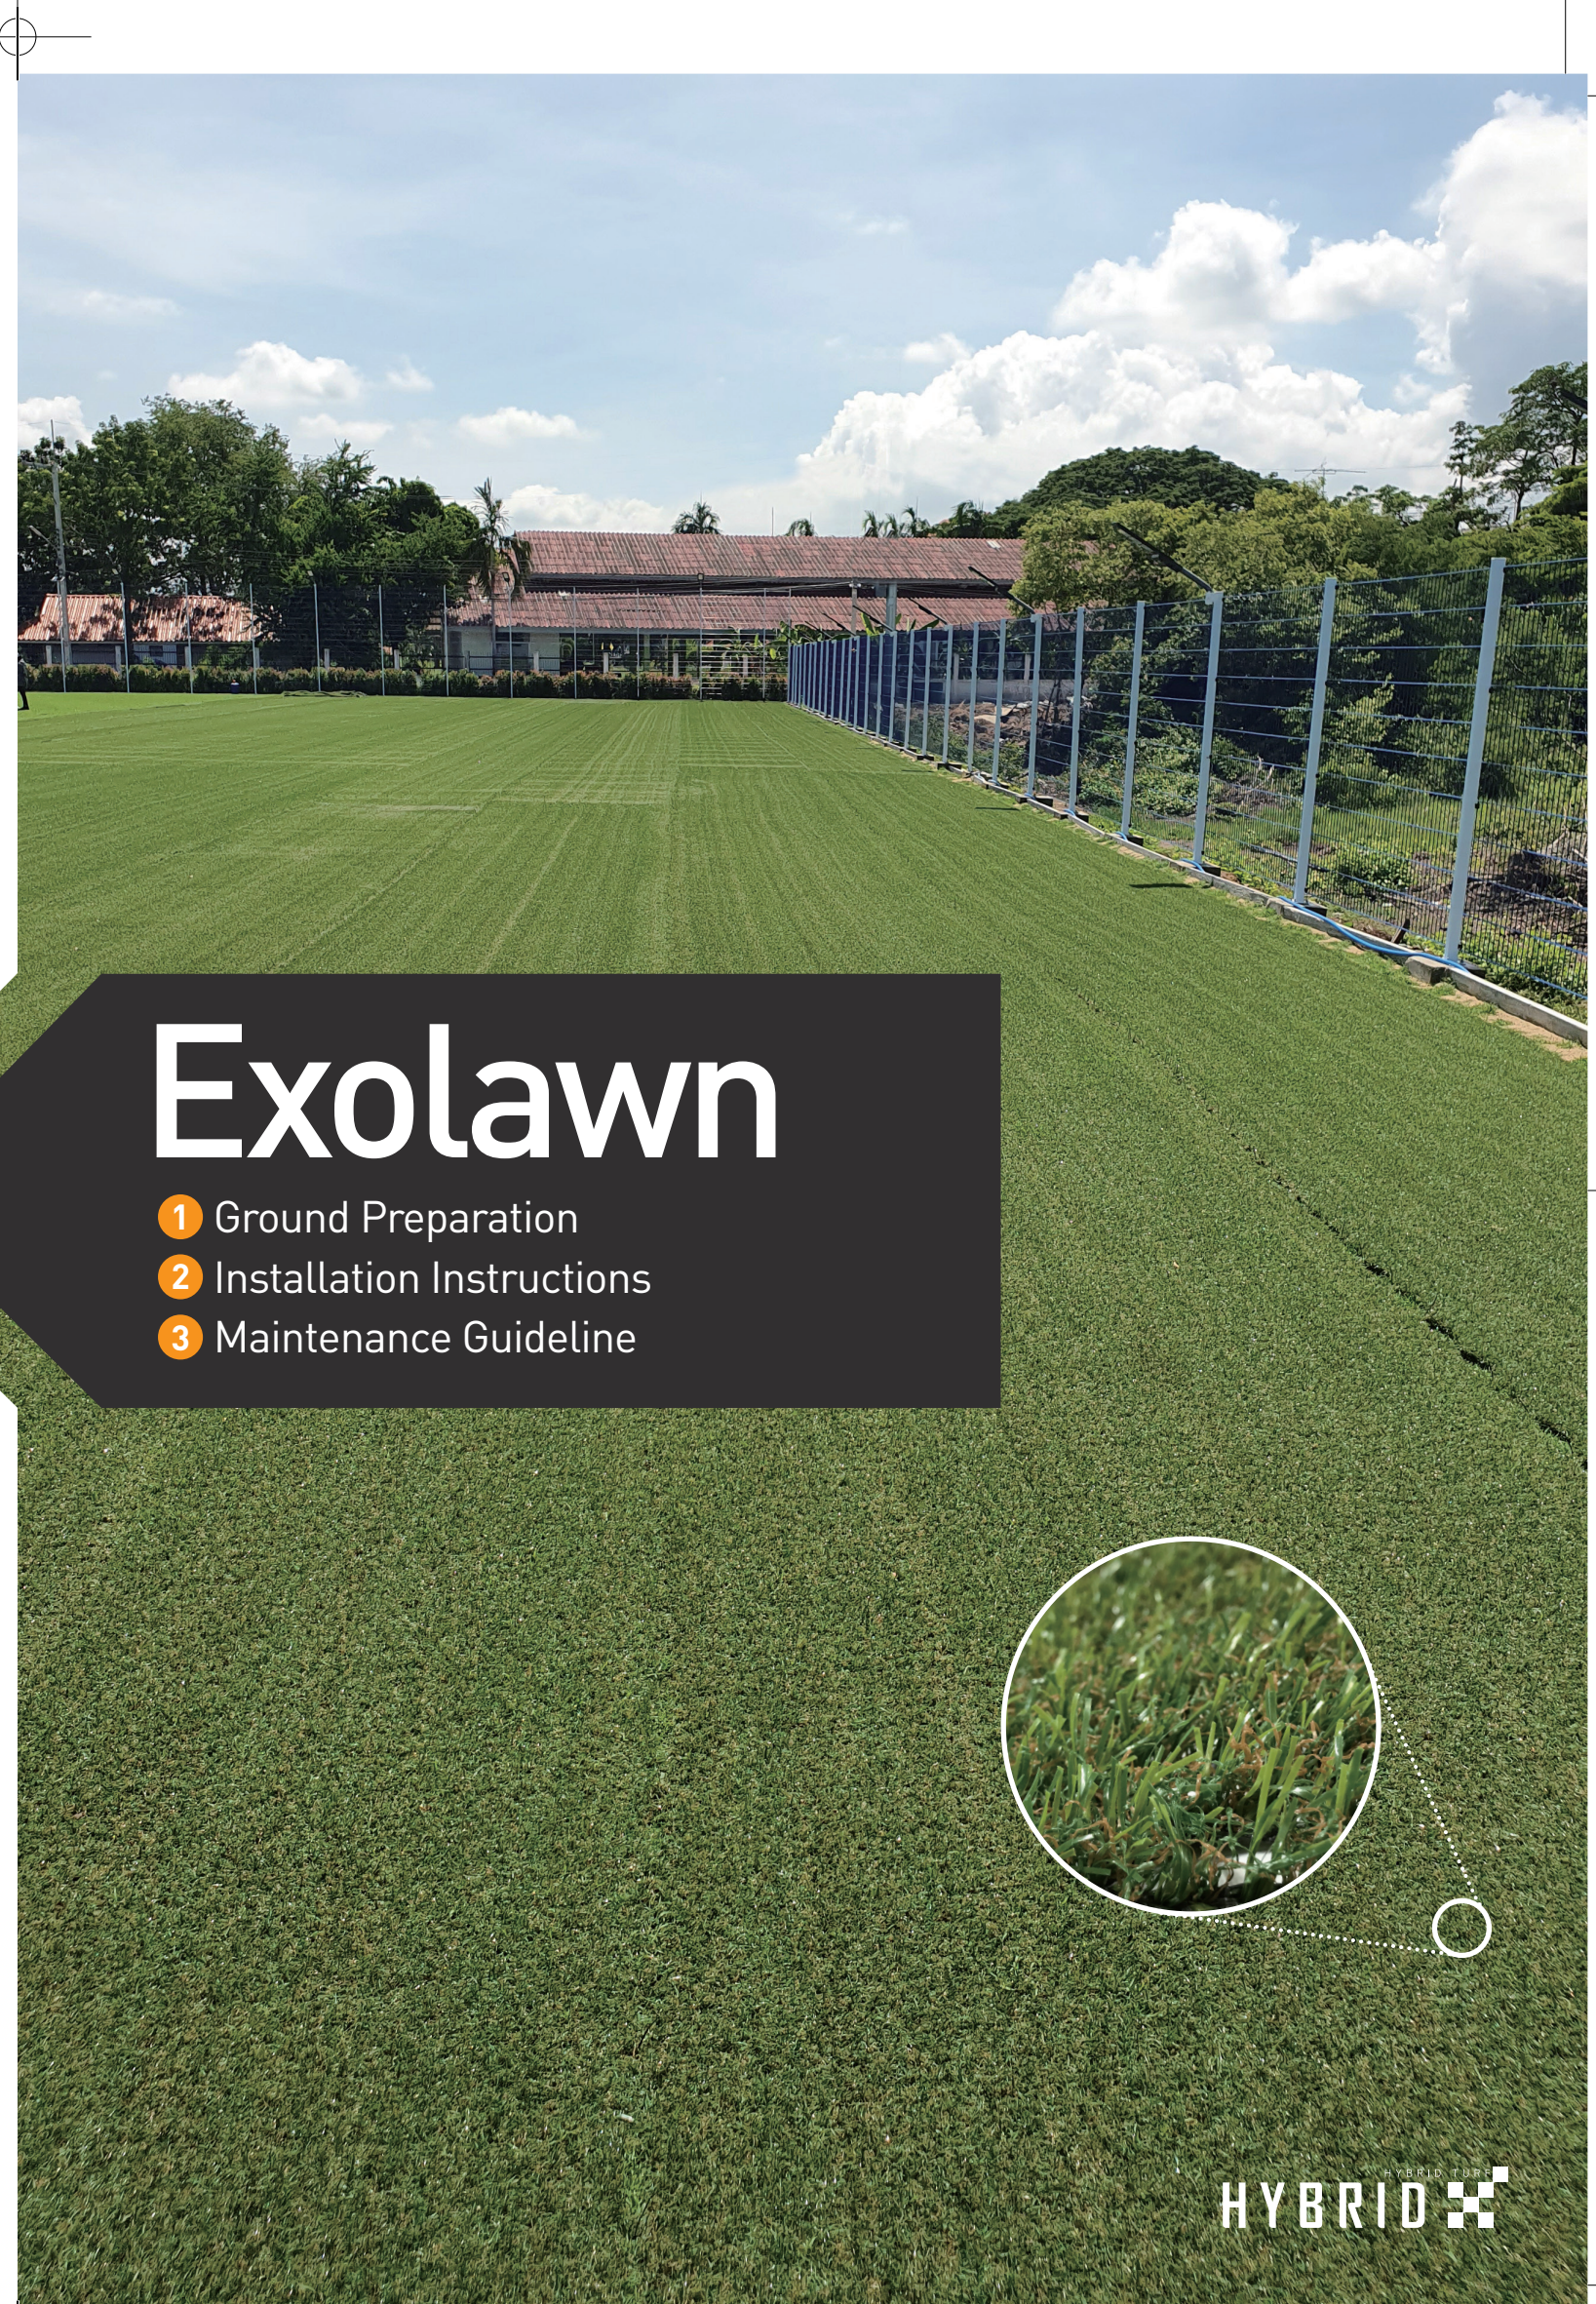

# Ground Preparation




1. The surface you plan on installing should be even and solid
2. \*If your soil and grass state is in fair condition please disregard and skip to 3\*
  - i. If your current surface is too compact for growth, aerate the entire surface for best result, seed and sand after aerating
  - ii. The new surface should be as solid as possible, not leaving deep footprints while walking and anchoring U-pins during installation
3. If you have a grass surface, mow the existing grass to under an inch or the lowest setting your mower allows
4. If there are bare spots on your grass lawn, fill with seed and sand or take basic measures to fix these areas before installing
5. If there are any uneven lies on your surface, fill with sand to make sure the surface is even as possible



# Installation instruction for **single roll** After proper ground preparation

1. Measure and mark the desired site
2. Remove stones, weeds or any additional objects before installing
3. Using a scissor or box cutters, cut out the straight edges that are attached (see picture 1)
4. Roll the product out, cut and trim to desired measurement
5. Using a shovel or garden spade, tuck one side of the edge into the soil (see picture 2)
6. Apply U- shaped pins into the tucked edge using a hammer (see picture 3)
7. After one side is tucked and pinned into the ground, pull the opposite side, starting from the middle. Make sure to have the product stretched tightly while inserting pins to ensure its flattened out evenly
8. Apply additional U- shaped pins on the opposite edge and on any uneven areas (see graphic below for complete pin consumption)

\*\* To install multiple rolls, follow the same instructions above, just overlap the edges of the two rolls and join them by U-pinning the overlapped area (see picture 4)\*\*



6.5ft X 10 ft size  
U pin every 1' 1/2" length  
U pin every 1' 1/4" width

